




Spot		Medium		Flood	
17°		23°		38°	
m	ø	m	ø	m	ø
1.0	0.30	1.0	0.41	1.0	0.70
2.0	0.60	2.0	0.83	2.0	1.39
3.0	0.91	3.0	1.24	3.0	2.09

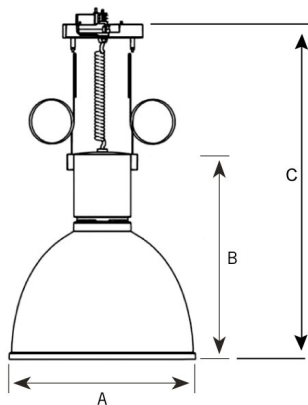

A 424 B 480 C 600 (mm)

Globe COB 3000

Technical specification

Pendulum with incorporated electronic gear for LED lamps. High quality lenses with different beam spreads.

Model and colors Lampshade available in brushed aluminium. Mounting for monopoint or track. Cable always in black. Extendable cable 6m.

Area of use Pendulum for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	4,43 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	Vertical
Start time	Instant
Driver	Built in
Optics	PMMA
Beam spreads	Spot, Medium, Flood

Art no	Description	Color
221-530-20	Globe COB, Spot	Black
221-530-32	Globe COB , Spot	Dark Grey
221-531-20	Globe COB, Medium	Black
221-531-32	Globe COB , Medium	Dark Grey
221-532-20	Globe COB , Flood	Black
221-532-32	Globe COB, Flood	Dark Grey
054-70-10	Monopoint with Bracket	White
054-70-20	Monopoint with Bracket	Black
054-70-30	Monopoint with Bracket	Grey
054-71-10,054-71-20	Track bracket,Track bracket	White ,Black
054-71-10,054-71-20	Track bracket,Track bracket	White ,Black

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	2800	27	A+
930	2650	30	A+
840	2700	24	A++
940	2650	27	A+

Note

Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Special versions can also be produced depending on quantity. North American versions also available.