




Flood	
97°/76°	
m	∅
1.0	2.27
2.0	4.54
3.0	6.81

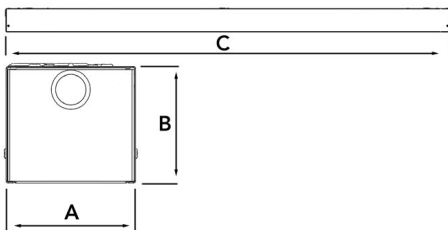

A 89,4 B 80,4 C 1541 (mm)

Grid LED 5000 for ceiling mount

Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of powder painted sheet metal. Built in electronic.

Model and colors Available in white.

Area of use LED light for indoor ceiling applications, suitable for general lighting.

Technical data

Mains (input) voltage	220-240 V
Total weight	4,57 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Beam spreads	Flood
Design lifetime	L80 B10 50 000h

Art no	Description	Color
204-559	GRID LED 5000, 1541mm, 830 for ceiling mount	White
204-560	GRID LED 5000, 1541mm, 835 for ceiling mount	White
204-561	GRID LED 5000, 1541mm, 840 for ceiling mount	White
1523	M4x6 wire kit with screw	-
047-122	M4x5 wire kit with screw	-

Type	Delivered lumen output (lm)	System power (W)	EEI ³
830	5300	51	A+
835	5450	51	A+
840	5550	51	A+

Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.