



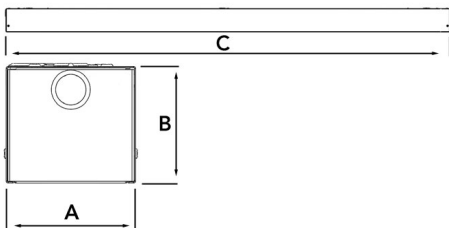

Flood	
	97°/76°
m	∅
1.0	2.27
2.0	4.54
3.0	6.81

A 89,4 B 80,4 C 1541 (mm)

## Grid LED 7000 for track

### Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of powder painted sheet metal. Built in electronic.

**Model and colors** Available in white.

**Area of use** LED light for indoor track applications, suitable for general lighting.

### Technical data

Mains (input) voltage	220-240 V
Total weight	4,57 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Beam spreads	Flood
Design lifetime	L80 B10 50 000h

Art no	Description	Color
204-580	GRID LED 7000, 1541mm, 830 for track mount	White
204-581	GRID LED 7000, 1541mm, 835 for track mount	White
204-582	GRID LED 7000, 1541mm, 840 for track mount	White

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	7140	72	A+
835	7320	72	A+
840	7750	72	A+

### Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.