



## Ibis LED 8000

### Technical specification

Linear down light for LED tubes. Reflector with flood beam spread. Housing of Powder painted aluminium.

**Model and colors** Available in grey.


**Area of use** LED light for indoor applications, suitable for general lighting.

### Technical data

Mains (input) voltage	220-240 V
Total weight	2 kg
Form of protection	IP 20, class I
Color temperature	3 000 K
Light source	LED
Operating position	Vertical
Lamp holder	NLAB Standard
Control gear	Electronic
Start time	Instant
Driver	Included
Reflector	High quality anodized reflector
Optics	
Beam spreads	Flood

Art no	Description	Color
223-5xx	Ibis LED 8000,830, 220-240V, for Track mounting	Grey


Flood	
100°/42°	
m	∅
1.0	2.40
2.0	4.80
3.0	7.20



Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
830	7800	72	A++
835	8000	72	A++
840	8200	72	A++

### Note

Product also available in higher power levels. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used. Please ask Nordic Light for latest availability update.

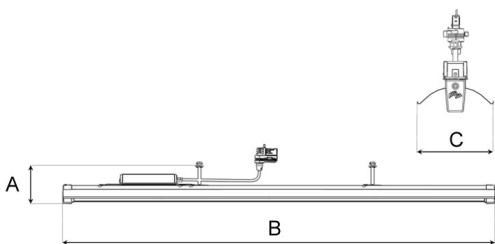

A 131 B 1492 C 151 (mm)