




| Spot |      | Medium |      | Flood |      | Wide Flood |      |
|------|------|--------|------|-------|------|------------|------|
| 14°  |      | 26°    |      | 37°   |      | 55°        |      |
| m    | ø    | m      | ø    | m     | ø    | m          | ø    |
| 1.0  | 0.24 | 1.0    | 0.47 | 1.0   | 0.68 | 1.0        | 1.05 |
| 2.0  | 0.48 | 2.0    | 0.94 | 2.0   | 1.35 | 2.0        | 2.10 |
| 3.0  | 0.72 | 3.0    | 1.41 | 3.0   | 2.03 | 3.0        | 3.15 |



A 170 B 115,5 C 150 (mm)

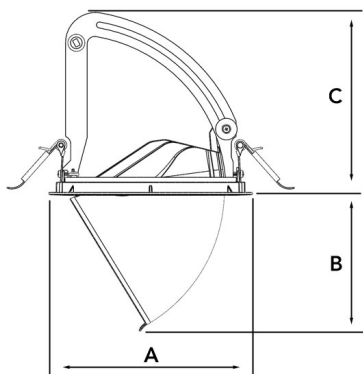

Saw instruction: ø 160 mm

## Amber FOOD

### Technical specification

Retractable and rotating down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

**Model and colors** Available in white, black and grey.

**Area of use** Down light for indoor applications.

### Technical data

|                       |                                 |
|-----------------------|---------------------------------|
| Mains (input) voltage | 220-240 V                       |
| Total weight          | 0,92 kg                         |
| Form of protection    | IP 20, class III                |
| Light source          | LED                             |
| Operating position    | 360°/60°                        |
| Start time            | Instant                         |
| Driver                | Stand alone, included           |
| Optics                | Metalized aluminum reflector    |
| Beam spreads          | Spot, Medium, Flood, Wide flood |

### Art no

282-5xx\*-10  
282-5xx\*-20  
282-5xx\*-30  
168-25  
265-307-001  
274-322-001  
236-318-101  
236-316-101

### Description

Spot, Medium, Flood or Wide flood  
Spot, Medium, Flood or Wide flood  
Spot, Medium, Flood or Wide flood  
Support plate  
Honeycomb filter  
Filter holder  
Diffuser glass  
Assymetric glass

### Color

White  
Black  
Grey  
-  
-  
-  
-  
-

| Type    | Delivered lumen output / Kelvin | System power (W) | EEI <sup>3</sup> |
|---------|---------------------------------|------------------|------------------|
| FB 1500 | 1480lm / 2500k                  | 24               | A                |
| FB 2000 | 2090lm / 2500k                  | 39               | A                |
| FF 1500 | 1520lm / 5000k                  | 13               | A++              |
| FF 2000 | 1880lm / 5000k                  | 15               | A++              |
| FF 3000 | 3000lm / 5000k                  | 28               | A+               |
| FF 4000 | 3950lm / 5000k                  | 39               | A+               |
| FV 2000 | 1900lm / 3000k                  | 19               | A+               |
| FV 3000 | 2970lm / 3000k                  | 31               | A                |
| FV 4000 | 3600lm / 3000k                  | 39               | A                |
| FM 1500 | 1420lm / 2000k                  | 22               | A                |
| FM 2000 | 1950lm / 2000k                  | 31               | A                |
| FM 2500 | 2360lm / 2000k                  | 39               | A                |

### Note

\*Art nr. -5xx: Depends on COB choice.

FB suitable for bread products.

FF suitable for fish products.

FV suitable for fruit and vegetables products.

FM suitable for meat products.

Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.