




| Spot | | Medium | | Flood | |
|------|------|--------|------|-------|------|
| 16° | | 28° | | 40° | |
| m | ø | m | ø | m | ø |
| 1.0 | 0.28 | 1.0 | 0.50 | 1.0 | 0.73 |
| 2.0 | 0.56 | 2.0 | 1.00 | 2.0 | 1.46 |
| 3.0 | 0.83 | 3.0 | 1.51 | 3.0 | 2.18 |

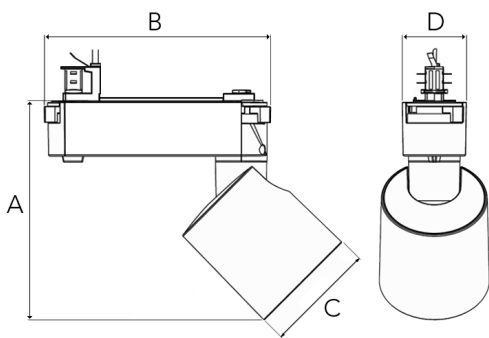

A 166 B 172 C 83,5 D 49 (mm)

Revoc mini 1500

Technical specification

Track light with incorporated electronic gear and Chip on board. High quality reflectors with three different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight. Black front ring.

Model and colors Available in white, black and grey.

Area of use Track light for indoor applications.

Technical data

| | |
|-----------------------|------------------------------|
| Mains (input) voltage | 220-240 V |
| Total weight | 0,76 kg |
| Form of protection | IP 20, class I |
| Light source | LED |
| Operating position | 360°/90° |
| Start time | Instant |
| Driver | Built in |
| Optics | Metalized aluminum reflector |
| Beam spreads | Spot, Medium, Flood |

| Art no | Description | Color |
|------------|-------------|-------|
| 285-500-10 | Spot | White |
| 285-500-20 | Spot | Black |
| 285-500-30 | Spot | Grey |
| 285-501-10 | Medium | White |
| 285-501-20 | Medium | Black |
| 285-501-30 | Medium | Grey |
| 285-502-10 | Flood | White |
| 285-502-20 | Flood | Black |
| 285-502-30 | Flood | Grey |

| Type | Delivered lumen output (lm) | System power (W) | EEI ³ |
|------|-----------------------------|------------------|------------------|
| 930 | 1400 | 12 | A++ |
| 940 | 1380 | 12 | A++ |
| 840 | 1470 | 11 | A++ |

Note

The above article numbers applies to 930.

Product available in other Kelvin temperatures on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.