


Edge 4000

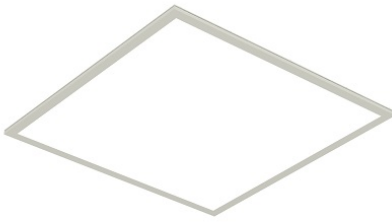

Prism		Soft	
100°		114°	
m	ø	m	ø
1.0	2.03	1.0	3.09
2.0	4.06	2.0	6.18
3.0	6.08	3.0	9.27

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room size	Viewing direction at right angles to lamp axis				Viewing direction parallel to lamp axis						
X Y											
2H	2H	15.3	16.5	15.6	16.7	16.9	16.8	18.0	17.1	18.3	18.5
	3H	16.3	17.4	16.6	17.7	17.9	18.2	19.3	18.5	19.5	19.8
	4H	17.0	18.1	17.4	18.3	18.6	18.8	19.8	19.1	20.1	20.4
	6H	17.7	18.7	18.1	19.0	19.3	19.2	20.2	19.6	20.5	20.8
	8H	18.0	18.9	18.3	19.2	19.5	19.4	20.3	19.8	20.6	20.9
	12H	18.2	19.0	18.5	19.3	19.7	19.5	20.4	19.9	20.7	21.0
4H	2H	15.6	16.6	15.9	16.9	17.2	17.0	18.0	17.3	18.3	18.5
	3H	16.9	17.7	17.2	18.1	18.4	18.5	19.3	18.8	19.6	20.0
	4H	17.8	18.5	18.1	18.9	19.2	19.2	19.9	19.5	20.3	20.6
	6H	18.7	19.4	19.1	19.7	20.1	19.8	20.4	20.2	20.8	21.2
	8H	19.1	19.7	19.5	20.1	20.5	20.0	20.6	20.5	21.0	21.4
	12H	19.4	19.9	19.8	20.3	20.8	20.2	20.8	20.7	21.2	21.6
8H	4H	18.0	18.6	18.4	19.0	19.4	19.2	19.9	19.7	20.2	20.7
	6H	19.1	19.6	19.5	20.0	20.4	20.0	20.5	20.4	20.9	21.4
	8H	19.6	20.0	20.1	20.5	21.0	20.4	20.8	20.8	21.2	21.7
	12H	20.0	20.4	20.5	20.9	21.4	20.7	21.0	21.2	21.5	22.0
12H	4H	18.0	18.5	18.4	19.0	19.4	19.3	19.8	19.7	20.2	20.7
	6H	19.2	19.6	19.6	20.0	20.5	20.1	20.5	20.5	20.9	21.4
	8H	19.7	20.1	20.2	20.6	21.1	20.4	20.8	20.9	21.3	21.8
Variation of the observerposition for the luminaire distance S											
S = 1.0H	+0.2 / -0.3				+0.2 / -0.3						
S = 1.5H	+0.4 / -0.8				+0.4 / -0.9						
S = 2.0H	+0.7 / -1.2				+1.0 / -0.9						
Standard table	BK06				BK05						
Correction summand	2.1				3.0						

Technical specification
Edge's high grade prismatic diffuser offers comfortable and low glare lighting without individual LEDs being visible. Alternatively an opaque soft diffuser can be provided. The surface mounted variant is only 14mm high. Separated NL Power LED electronic ballast for optimal life time and light flow performance.

Model and colors Surface mounted, recessed or suspended. Available in white.

Area of use Light panel for Indoor applications.

Technical data

Total weight	4 kg
Form of protection	IP 20, class III
Light source	LED
Start time	Instant
Driver	Stand alone, included

Art no

301-510-10
301-511-10
301-513-10
301-514-10
301-533-10
301-534-10
047-286
047-286

Description

830 Prism diffusor
830 Soft diffusor
840 Prism diffusor
840 Soft diffusor
940 Prism diffusor
940 Soft diffusor
Surface mounted frame
Suspension kit, 6m wire


Color

White
White
White
White
White
White
White
-

Type	Delivered lumen output (lm)	Power (W)	EEI ³
830	3800	31	A++
840	3900	30	A++
940	3350	30	A++

Note

Product available in other Kelvin temperatures on request. Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.

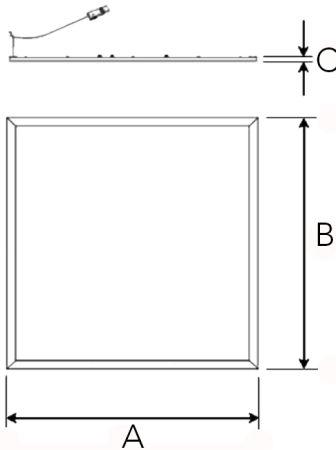

A 595 B 595 C 14 (mm)