




Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15



A 158 B 122 C 121.5 (mm)

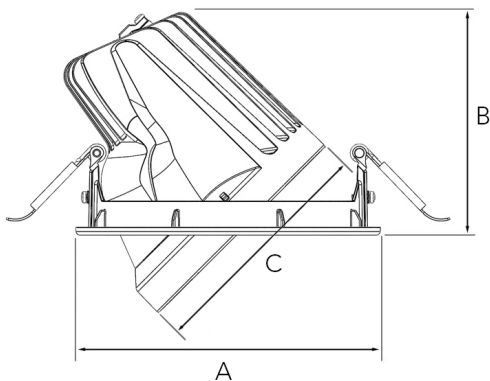

Saw instruction: ø 150 mm

## Moon 3000

### Technical specification

Tiltable and rotating down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight. Adjustable light direction using gyro function, max 45 degrees.

**Model and colors** Available in white, black and grey.

**Accessories** Support plate.

**Area of use** Down light for indoor applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	0,83 kg
Form of protection	IP 20, class III
Light source	LED
Operating position	Vertical/Gyro
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
295-500-10	Spot	White
295-500-20	Spot	Black
295-500-30	Spot	Grey
295-501-10	Medium	White
295-501-20	Medium	Black
295-501-30	Medium	Grey
295-502-10	Flood	White
295-502-20	Flood	Black
295-502-30	Flood	Grey
295-503-10	Wide flood	White
295-503-20	Wide flood	Black
295-503-30	Wide flood	Grey
292-305	Support frame	-
265-307-001	Honeycomb filter	-
274-322-001	Filter holder	-
236-318-101	Diffuser glass	-
236-316-101	Assymetric glass	-

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
930	2800	24	A++
940	2800	24,5	A++
840	2900	22	A++

### Note

The above article numbers applies to 930.

Product available with Food COB on request. Product available in other Kelvin temperatures on request. Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.