



Quad 1200

Technical specification

Recessed down light with four tiltable and rotating spot lights. Chip on board and incorporated electronic gear for optimal life time and light flow performance. High quality reflectors with three different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

Model and colors Available in white, black and grey with white front rim.


Area of use Down light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	1,9 kg
Form of protection	IP 20, class III
Light source	LED
Operating position	360°/40°
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood

Spot		Medium		Flood	
14°		26°		36°	
m	ø	m	ø	m	ø
1.0	0.25	1.0	0.45	1.0	0.65
2.0	0.51	2.0	0.91	2.0	1.29
3.0	0.76	3.0	1.36	3.0	1.94

Art no	Description	Color
273-510-10	Spot	White
273-510-20	Spot	Black
273-510-30	Spot	Grey
273-511-10	Medium	White
273-511-20	Medium	Black
273-511-30	Medium	Grey
273-512-10	Flood	White
273-512-20	Flood	Black
273-512-30	Flood	Grey
1603	Suspension plate	-
273-310-001	Diffuser, Micro reflector	-

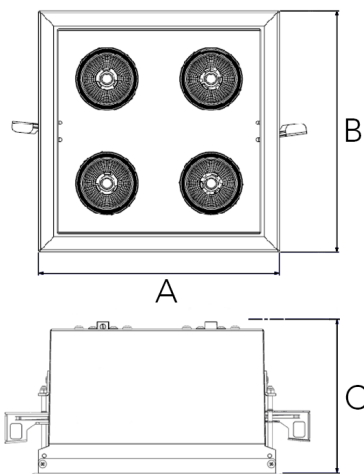

A 226,5 B 226,5 C 140 (mm)



Saw instruction: 219x204 mm

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	4 x 1000	4 x 11	A

Note

The above article numbers applies to 930.

Product available in other Kelvin temperatures on request. Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.