




Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15



A 233 B 161 C 200 (mm)

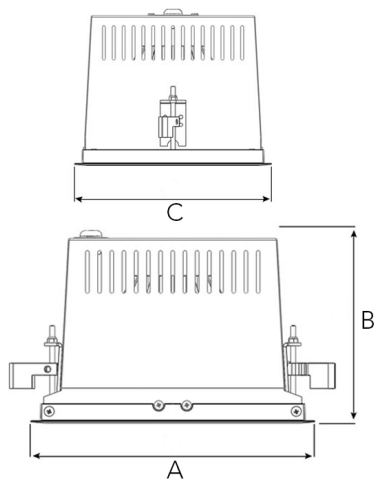

Saw instruction: 220 x 187 mm

Slim I 4000

Technical specification

Recessed down light with adjustable light direction using gyro function. Chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

Model and colors Available in white, black and grey.

Accessories Faceplate.

Area of use Down light for indoor applications.

Technical data

Mains (input) voltage	220-240 V
Total weight	1,6 kg
Form of protection	IP 20, class III
Light source	LED
Operating position	Vertical/Gyro
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
270-585-10	Spot	White
270-585-20	Spot	Black
270-585-30	Spot	Grey
270-586-10	Medium	White
270-586-20	Medium	Black
270-586-30	Medium	Grey
270-587-10	Flood	White
270-587-20	Flood	Black
270-587-30	Flood	Grey
270-588-10	Wide flood	White
270-588-20	Wide flood	Black
270-588-30	Wide flood	Grey
1603	Suspension plate	-
236-318-101	Diffuser glass	-
236-316-101	Assymetric glass	-

Type	Delivered lumen output (lm)	System power (W)	EEI ³
930	3850	35	A++
940	3800	36	A+
840	3880	30	A++

Note

The above article numbers applies to 930.

Product available in other Kelvin temperatures on request. Product available with DALI option on request. Product also available with faceplate. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.