





Spot		Medium		Flood		Wide Flood	
14°		26°		37°		55°	
m	ø	m	ø	m	ø	m	ø
1.0	0.24	1.0	0.47	1.0	0.68	1.0	1.05
2.0	0.48	2.0	0.94	2.0	1.35	2.0	2.10
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15

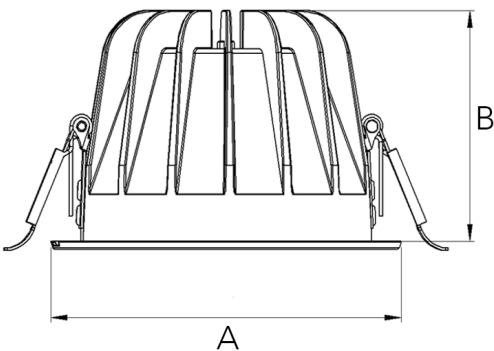

A 144 B 90 (mm)



Saw instruction: ø 128

## Titan 3000

### Technical specification

Recessed down light with chip on board and separated NL Power LED electronic ballast for optimal life time and light flow performance. High quality reflectors with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling and low weight.

**Model and colors** Available in white, black and grey.

**Area of use** Down light applications.

### Technical data

Mains (input) voltage	220-240 V
Total weight	0,55 kg
Form of protection	IP20/IP44 with front glass. IP20 without front glass
Light source	LED
Operating position	Vertical/fixed
Start time	Instant
Driver	Stand alone, included
Optics	Metalized aluminum reflector
Beam spreads	Spot, Medium, Flood, Wide flood

Art no	Description	Color
271-500-10	Spot	White
271-500-20	Spot	Black
271-500-30	Spot	Grey
271-501-10	Medium	White
271-501-20	Medium	Black
271-501-30	Medium	Grey
271-502-10	Flood	White
271-502-20	Flood	Black
271-502-30	Flood	Grey
271-503-10	Wide flood	White
271-503-20	Wide flood	Black
271-503-30	Wide flood	Grey
094-28	Support frame	-
236-318-101	Diffuser glass	-
236-316-101	Assymetric glass	-

Type	Delivered lumen output (lm)	System power (W)	EEI <sup>3</sup>
930	2800	24	A++
940	2800	24,5	A++
840	2900	22	A++

### Note

The above article numbers applies to 930.

Product available with Food COB on request. Product available in other Kelvin temperatures on request. Product available with DALI option on request. Final shipping destination may require minor modifications of components as well as article numbers, be sure to state the country in which the fixtures will be used.