


LIVAL

Standard

- Allrounder, perfect for all segments
- Easy lightsetting
- Reflectors: 15D, 24D, 36D
- Available Drivers: ON/OFF, Dali, Wireless Masterconnect, Casambi

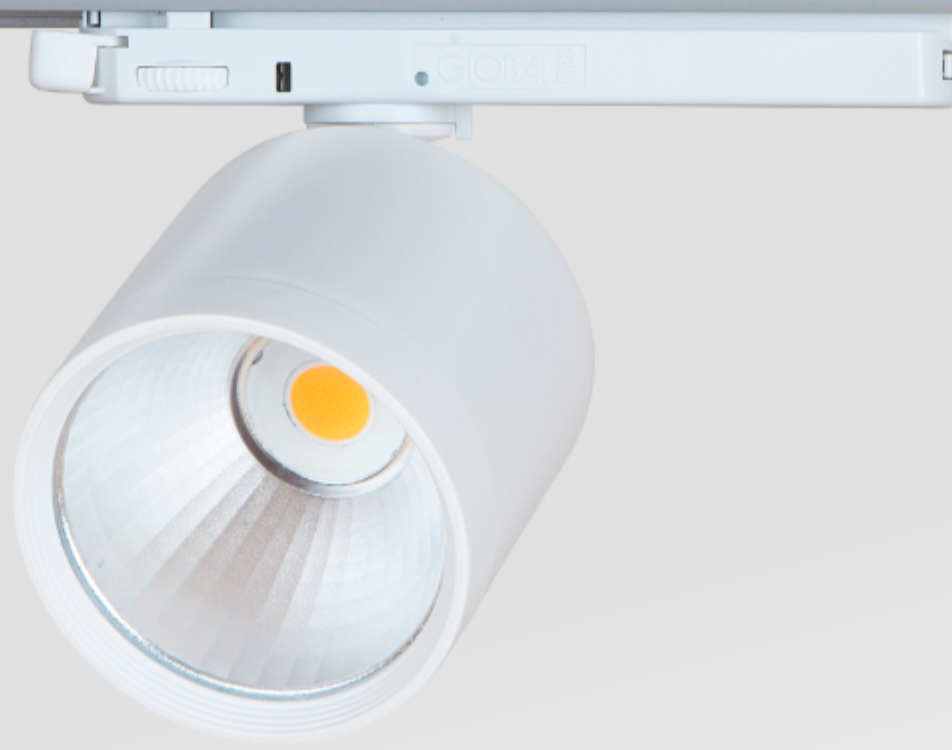

Technical data

Input Power	LED-Module	Color Consistency	Installation Type	Material	Lumen Maintenance	Luminaire Color
220 - 240V	PHILIPS - SAMSUNG - CITIZEN	2-Step MacAdam	Nordic Aluminium Global Trac	Powder Painted Die-Cast Aluminum	50 000h L80 B10	White (RAL 9016), Black (RAL 9005), Silver (ca RAL 9006)

Technical Data

COB Type	Forward current	System Luminous Flux	System Power	Lm/W
CRI 90 3000K	350mA	1 726 lm	13,9 W	124.0
CRI 90 3000K	650mA	3 090 lm	25,4 W	121.6
CRI 90 3000K	850mA	3 936 lm	33,7 W	116.8
CRI 90 4000K	350mA	1 815 lm	13,9 W	130.6
CRI 90 4000K	650mA	3 265 lm	25,4 W	128.5
CRI 90 4000K	850mA	4 170 lm	33,7 W	123.7

